


**PLAN VIEW**

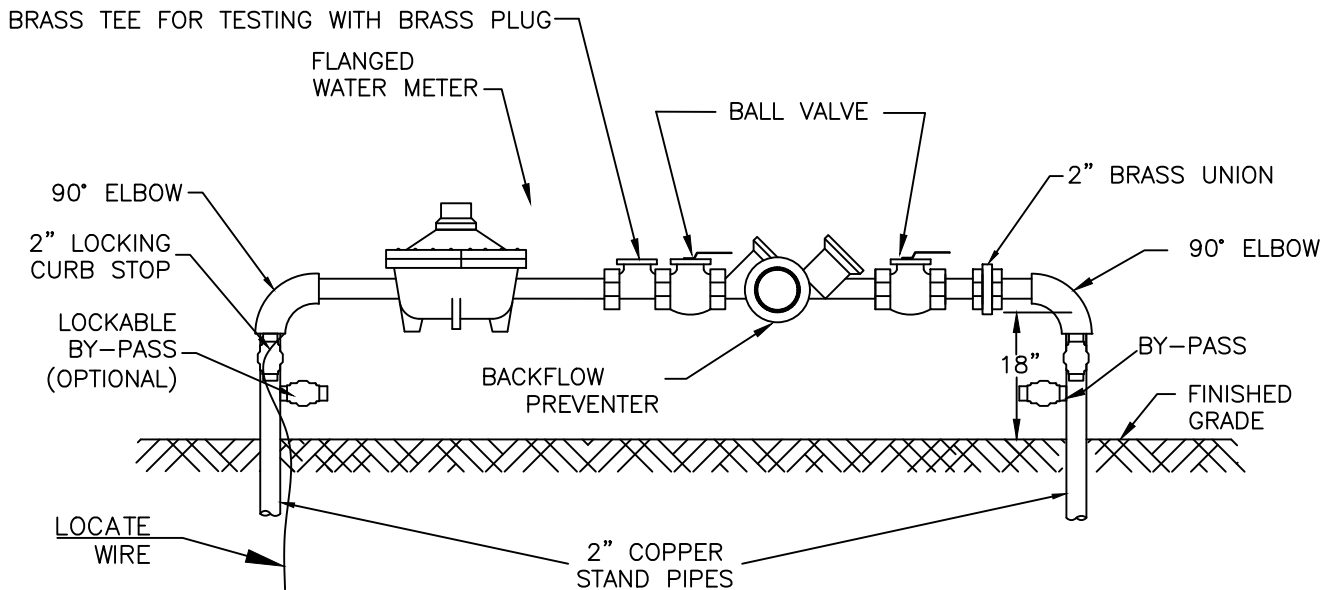


**PROFILE VIEW**

**1", 1.5" & 2" POTABLE / RECLAIMED  
WATER METER & BACKFLOW  
PREVENTION ASSEMBLY SERVICE  
(COMMERCIAL)**

**NOTES:**

1. LANDSCAPING REQUIRED PER CITY OF STUART ORDINANCE. NO PLANTS OR TREES WITHIN 18" AROUND METER OR BACKFLOW. NO SOLDER JOINTS. MUST BE SCREENED, NO GROW IN PERIOD.
2. ASSEMBLY TO BE 18" FROM FINISH GRADE TO CENTERLINE OF THE 90° BEND.
3. RECLAIMED WATER METER ASSEMBLY MUST BE PAINTED PANTONE PURPLE 522.
4. NO SOLDER JOINTS.
5. NO TAPS OR CONNECTIONS ALLOWED BETWEEN METER AND BACKFLOW PREVENTION DEVICE
6. METERS 1.5" OR LARGER ARE TO BE PROVIDED BY THE DEVELOPER PER CITY'S APPROVED PRODUCTS LIST.



**STANDARD UTILITY DETAILS**  
**City of Stuart**  
**Utilities & Engineering Department**  
 121 S.W. Flagler Avenue, Stuart, Florida 34994

**BACKFLOW PREVENTION ASSEMBLY**

DATE: OCTOBER 2021  
 FILE NAME: 2021 COS Std Details.dwg

SHEET NUMBER

**31**