



**DETAIL "A"**

SEE DETAIL "A"  
FOR FILLING  
ASSEMBLY

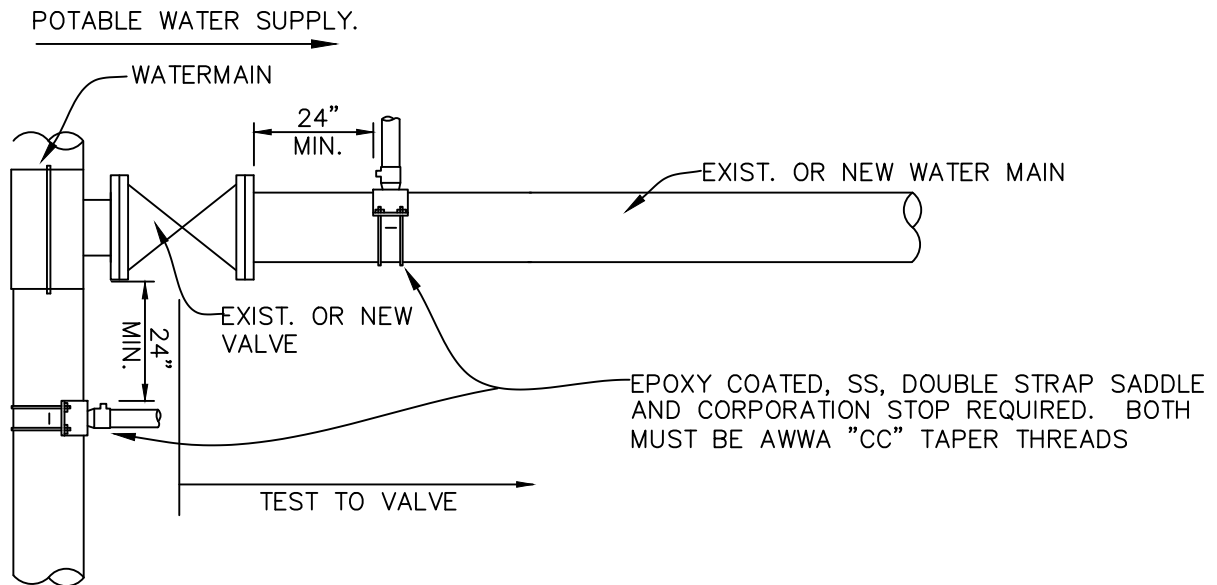

**NOTES:**

1. GATE VALVE SHALL BE KEPT CLOSED.
2. DEPARTMENT SHALL BE NOTIFIED BEFORE FILLING AND FLUSHING.
3. AFTER BACTERIOLOGICAL CLEARANCE, GATE VALVE IS TO BE OPEN WITH VALVE BOX.
4. PRESSURE TEST PUMP CONNECTS TO SERVICE LINE OR BLOWOFF. NO EXTRA TAPS ARE PERMITTED.
5. PRESSURE GAUGE TO BE LOCATED IN VICINITY OF TEST PUMP CONNECTION.
6. GAUGE AND RISER TO BE REMOVED AFTER PRESSURE TEST.
7. REMOVE TEMPORARY CONNECTION AT CORPORATION STOPS AFTER FILLING & FLUSHING HAS BEEN COMPLETED.
8. INJECT CHLORINE ON PROJECT SIDE OF BACKFLOW PREVENTER.
9. MUST OBTAIN METER AND BACKFLOW ASSEMBLY FROM CITY OF STUART. PRIOR TO INSTALLATION.



**STANDARD UTILITY DETAILS**  
City of Stuart  
Utilities & Engineering Department

121 S.W. Flagler Avenue, Stuart, Florida 34994

**FILLING & FLUSHING CONNECTION**

DATE: OCTOBER 2021  
FILE NAME: 2021 COS Std Details.dwg

SHEET NUMBER  
**50**